

Overview

The latest 1P rack server, HP ProLiant DL320e Gen8 Server series, is a new entry level rack-optimized platform, ideal for single-application IT infrastructure, web and edge-of-network applications. The ProLiant DL320e Gen8 Server is not only affordable but is more powerful by enabling powerful quad-core processor computing performance with larger memory & storage capacity, all in a small package.

The DL320e Gen8 supports the latest technology, such as Intel® Xeon® E3 Pentium processors, PCI-e Gen3, DDR3 1600MHz memory, up to 12TB internal storage, RAID solution as well as High Efficiency Hot Plug Redundant Power Supply Kit.

HP ProLiant DL320e Gen8 Server series supports HP iLO Management Engine, a complete set of embedded management features supporting the complete lifecycle of the server, from initial deployment, through ongoing management, to service alerting and remote support.

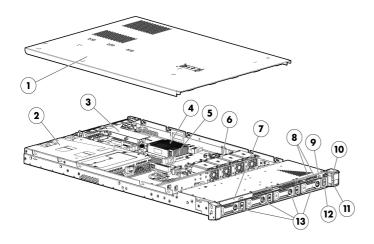

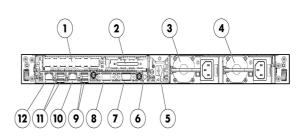

Front View:

- 1. Access Panel
- 2. Power Supply
- 3. PCI Riser Cage
- 4. Processor
- 5. DIMMs
- 6. Fans
- 7. Optical drive
- 8. 2 USB Connectors
- 9. UID LED button
- 10. Health LED
- 11. NIC status LED
- 12. Power On/Standby button and LED
- 13. Hard Drive Bays

Rear View:

- 1. Expansion slot 2, PCIe x16
- 2. Expansion slot 1, PCIe x8
- 3. Power Supply 2
- 4. Power Supply 1
- 5. Dedicated iLO port
- 6. UID LED button
- 7. Serial Connector
- 8. Video Connector
- 9. USB Connectors
- 10. NIC Connector 1
- 11. USB Connectors
- 12. NIC Connector 2

What's New

 Support for 12G SAS High Endurance Hot Plug SFF (2.5-inch) Enterprise Performance and Enterprise Mainstream Solid State Drives



Standard Features

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

Processor

Entry Processors

One of the following depending on Model

Intel® Pentium® G2120 (3.1GHz/2-core/3MB/55W) Processor

NOTE: Intel® Pentium® G2120 Processor supports up to 1600MHz DDR3 memory speeds.

Performance Processors

NOTE: All support up to 1600MHz DDR3 memory speeds. Intel® Xeon® E3-1220Lv2 (2.3GHz/2-core/3MB/17W, HT) Intel® Xeon® E3-1220v2 (3.1GHz/4-core/8MB/69W) Intel® Xeon® E3-1230v2 (3.3GHz/4-core/8MB/69W, HT) Intel® Xeon® E3-1240v2 (3.4GHz/4-core/8MB/69W, HT)

Intel® Xeon® E3-1240v2 (3.4GHz/4-core/8MB/69W, HT)
Intel® Xeon® E3-1270v2 (3.5GHz/4-core/8MB/69W, HT)
Intel® Xeon® E3-1290v2 (3.7GHz/4-core/8MB/87W, HT)

NOTE: HT indicates that the processor model supports Intel® /Hyper-Threading Technology (Depends on

the processor).

NOTE: DDR3 speed is the maximum memory speed of the processor. Actual memory speed may depend on

the quantity and type of DIMMs and CPU installed (options for 1600, 1333, 1066MHz).

Cache Memory

8MB (1x8MB) Level 3

One of the following depending on Model

NOTE: For Quad-core processors.

3MB (1x3MB) Level 3

NOTE: For Dual-core processors.

Chipset

Intel® C204 Series Chipset

NOTE: For more information regarding Intel® chipsets, please see the following URL:

http://www.intel.com/products/server/chipsets/.

Upgradeability

Up to 4 DIMM slots available for higher Memory capacity

Up to 8 bay SFF Hot plug Drive Cage; Or 4 bay LFF Hot plug or Non hot plug Drive Cages

1 PCIe 2.0 expansion slot

1 PCIe 3.0 I/O slot for additional communications and storage expansion (depends on processor)

Redundant Power Supply

Optical Drive Bay

On System Management

HP iLO (Firmware: HP iLO 4)

Processor

NOTE: For more information, visit: http://www.hp.com/go/ilo.

Memory Protection

ECC



Standard Features

Memory

One of the following depending on Model

Type HP SmartMemory

Unbuffered (UDIMM)

DIMM Slots Available 4 DIMMs (2 Channels/ 2 DIMMs per channel)

Maximum Capacity

32GB (4 x 8GB@1600MHz)

(UDIMM)

NOTE: HP memory from previous generation servers are not fully compatible with the HP ProLiant DL320e Gen8 Server.

NOTE: To realize the performance memory capabilities listed in this document, HP SmartMemory is required. For additional information, please see the HP SmartMemory QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/14225_na/14225_na.html

NOTE: Depending on the memory configuration and processor model, the memory speed may run at 1600MHz, 1333MHz, or 1066MHz. Please see Memory Population Table or the Online Memory Configuration Tool at: www.hp.com/go/ddr3memory-configurator.

Network Controller

HP Ethernet 1Gb 2-port 330i Adapter

NOTE: The HP ProLiant DL320e Gen8 server has an embedded dual-port network adapter. The server can be further upgraded with various networking products

| Expansion Slots | Expansion Slots# | Technology | Bus Width* | Connector Width | Form Factor | Notes |
|-----------------|---------------------|------------|---------------|--------------------|-----------------------------------|-------|
| | 1 | PCIe 2.0 | x4 | x8 | Low profile slot | |
| | 2 | PCIe 3.0 | x16 | x16 | Half-length, full- height slot | |

*Indicates the number of physical electrical lanes running to the connector.

NOTE: PCIe 3.0 support with Intel Xeon E3-1200v2 family only.

HP Server ROM

HP ROM (Read Only Memory) is now digitally signed using HP's Corporate Signing Service. This signature is verified before the flash process starts, reducing accidental programming and preventing malicious efforts to corrupt system ROM.

HP ROM provides for essential initialization and validation of hardware components before control is passed to the customer-installed operating system. The ROM also provides the capability of booting from various fixed media (HDD, CD-ROM) and removable media (USB), to continue operation to the operating system.

HP ROM performs very early configuration of the video controller, to allow monitoring of initialization progress via an attached monitor. If configuration or hardware errors are discovered during this early phase of hardware initialization, suitable messages are now displayed on the connected monitor. Additionally, these configuration or hardware errors are logged to the Integrated Management Log (IML) to assist in diagnosis.

HP's ProLiant ROM is used to configure the following:

- Processor and chipset status registers
- System memory, memory map, and memory initialization
- System hardware configuration (Integrated PCI devices and optional PCIe cards).



Standard Features

Customer-specific BIOS configuration (using the HP ROM-Based Setup Utility (RBSU).

NOTE: For further information, please refer to HP's RBSU (ROM based setup utility) user guide: www.hp.com/support/rbsu.

Storage Controller

One of the following depending on Model

Entry Models HP Dynamic Smart Array B120i Controller

(Non hot plug) **NOTE:** Supports 3.0Gb/s SATA.

NOTE: Supports RAID 0/1/10 only. It does not have FBWC support so cannot support advanced RAID (5 onwards). For FBWC, a standup Smart Array

Controller card must be configured.

Base Models HP Dynamic Smart Array B120i Controller

(Hot plug) **NOTE:** Supports 3.0Gb/s SATA.

NOTE: Supports RAID 0/1/10 only. It does not have FBWC support so cannot support advanced RAID (5 onwards). For FBWC, a standup Smart Array

Controller card must be configured.

Performance Models

(Hot plug)

HP Smart Array P222/512MB FBWC controller **NOTE:** P222 can support RAID 0/1/10/5/5+0/6/6+0.

NOTE: HP Smart Array Advanced Pack (SAAP 2.0) is no longer required to enable RAID 6 & 60 (Advanced Data Guarding). However, controller must be in

firmware version 4.68 (or later).

NOTE: The DL320e Gen8 can support other advanced controllers as well, depending on model and configuration

NOTE: For set up instructions for HP Smart Array B120i SATA Controller please refer to the HP ProLiant DL300 series server user guide.

NOTE: For general information about HP Smart Array B120i SATA RAID Controller, please visit:

http://h18004.www1.hp.com/products/servers/proliantstorage/arraycontrollers

/dynamicsmartarray/index.html

Internal Storage Devices Diskette Drive

Diskette Drive None
Optical Drive Optional

DVD-ROM, DVD-RW

Hard Drives

One of the following depending on Model

None ship standard (Base Models and Performance Models)

1x NHP 500GB SATA 3.5" drive (Entry Models)

Hard Drive Bays 8 SFF drive bays or 4 LFF Non hot plug/Hot plug

NOTE: HP ProLiant DL320e Series servers offer both SFF, and LFF versions in

CTO. The Optical Drive bay is available with both models.

NOTE: LFF versions are not an upgradeable option from SFF models, or vice

versa, also between Non Hot Plug LFF and Hot Plug LFF.

NOTE: All Pre-configured Models come populated with some hard drive blanks installed. Should the customer need additional hard drive blanks, they can order more using either P/N 666987-B21: HP SFF Gen8 Hard Drive Blank Kit or P/N 666986-B21: HP LFF Gen8 Hard Drive Blank Kit. These part numbers for single HDD blanks below are also provided should the customer require

replacement HDD blanks for their server.



Standard Features

| Maximum | Internal |
|---------|----------|
| Storage | |

| Hot Plug SFF SAS | 9.6TB | 8 x 1.2TB |
|-----------------------|---------|-----------|
| Hot Plug SFF SATA | 8.0TB | 8 x 1TB |
| Hot Plug LFF SAS | 16.0TB | 4 x 4TB |
| Hot Plug LFF SATA | 16.0TB | 4 x 4TB |
| Hot Plug SFF SAS SSD | 6.4TB | 8 x 800GB |
| Hot Plug SFF SATA SSD | 6.4TB | 8 x 800GB |
| Hot Plug LFF SATA SSD | 3.2TB | 4 x 800GB |
| Non-Hot Plug LFF SATA | 12.0 TB | 4 x 3TB |
| | | |

Interfaces

Serial

Video 1 Rear standard video
HP iLO Remote 1Gb Dedicated

Management Network Port

SD slot 1 Internal

NOTE: The SD slot is not a hot-pluggable device. Customers should not attempt to plug an SD card into the SD slot while the server is powered.

USB 2.0 Ports 7 total: 4 rear, 2 front, 1 internal (Optional)

Industry Standard Compliance

ACPI 2.0b Compliant

PCIe 3.0 PXE Support WOL Support USB 2.0 Compliant

Server Power Cords

All Pre-configured Models servers ship with a high voltage server to PDU power cord.

NOTE: HP ProLiant DL servers no longer ship standard with a 12-foot NEMA 5-15P to C13 power cords (227099-001) that allow connection to 110V US wall outlets in a home or office. ProLiant DL servers are primarily connected to PDU's in data center racks so they now ship standard with only a PDU 6-foot C-14 to C13 power cord (142258-001). If a user wishes to power a ProLiant DL server using a110V receptacle (NEMA-15), the 12-foot NEMA 5-15 to C13 power cord must be ordered separately. See Power Cords section for Worldwide Power Cord options.

Power Specifications

To review typical system power ratings use the HP Power Advisor which is available via the online tool located at URL: www.hp.com/go/proliant-energy-efficient or www.hp.com/go/hppoweradvisor.

NOTE: Power Specification and Technical Content for supported power supplies can be found at: http://h18000.www1.hp.com/products/quickspecs/14209_na/14209_na.html



Standard Features

Common Slot Power Supply

NOTE: The default power supply for DL320e Gen8 server is a 350W Non Hot Plug, Non Redundant (ATX) power supply with 85% efficiency.

NOTE: To choose a Redundant Common Slot Power Supply option for the DL320e Gen8 server, a Factory Integrated Model must be chosen, beginning with a CTO server. Also, an HP DL320e Gen8 RPS Enablement FIO Kit (675451-B21) is required.

HP's Common Slot (CS) power supplies allow for commonality of power supplies across a wide range of ProLiant and Integrity servers, as well as HP Storage solutions, and are designed to provide the highest power supply efficiency without degrading system performance. HP CS power supplies are tested by the Electric Power Research Institute (EPRI) and certified through the ECOS 80 Plus power supply program. The 460W HP CS power supply option provides an efficiency rating of up to 94%. All HP Common Slot power sources are UL, CE Mark Compliant, hot-plug and support redundant configurations.

NOTE: Mixing of power supplies (for instance Common Slot Platinum Plus power supplies and Common Slot Gold power supplies) in the same server is not supported. All power supplies must be of the same output and efficiency rating. If non-matched power supplies are inserted you will get errors and operation will fail.

HP CS Platinum Plus power supplies are required when enabling HP's Intelligent Power Discovery (IPD) solution. IPD is the first technology to create an automated, energy-aware network between IT systems and facilities. This allows your company to reclaim millions of dollars in wasted power capacity and downtime costs across data centers. For more information on HP's IPD solution, go to www.hp.com/go/ipd.

It is highly recommended that you use the HP Power Advisor in defining the "Right-Size" power supply for your needs. HP Power Advisor can be accessed at: www.hp.com/go/hppoweradvisor.

NOTE: The 80 PLUS program is a unique forum that unites electric utilities, the computer industry, and consumers in an effort to bring energy efficient technology solutions to the marketplace. 80 Plus independently tests power supply efficiency and publicly posts the results on 80Plus.org.

Redundant Power: Optional (1+1 or n+n redundant) power supplies can be purchased through power supply option kits (see Power Supplies for part numbers).

NOTE: Power Specification and Technical Content for supported power supplies can be found at: http://h18000.www1.hp.com/products/quickspecs/14209_na/14209_na.html

System Fans

4 fan modules ship standard, non-redundant

Operating Systems and Virtualization Software Support for ProLiant Servers

Microsoft Windows Server Red Hat Enterprise Linux (RHEL) SUSE Linux Enterprise Server (SLES) VMware

NOTE: For more information on HP's Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server including how to purchase from HP, please visit our OS Support Site at: http://www.hp.com/go/ossupport and our driver download page: http://www.hp.com/support/DL320eGen8.



Standard Features

Graphics

Integrated Matrox G200 video standard

- 1280 x 1024 (32 bpp)1920 x 1200 (16 bpp)
- HP iLO 4 On System Management Memory
 - 16 MB Flash
 - 256 MB DDR 3 with ECC (112 MB after ECC and video)

Form Factor

One of the following depending on Model

1U Rack form factor

8 SFF Drive Bay Version:

1.7" (4.32cm) Height x 17.11" (43.46cm) Width x 27.5" (69.90cm) Length

4 LFF Drive Bay Version:

1.7" (4.32cm) Height x 17.11" (43.46cm) Width x 29.5" (75.00cm) Length

On System Management

HP iLO Management Engine HP iLO Management Engine is a comprehensive set of embedded management features supporting the complete lifecycle of the server, from initial deployment, through ongoing management, to service alerting and remote support. HP iLO Management Engine comes standard on all HP ProLiant Gen8 servers. The HP iLO Management Engine portfolio includes:

- **HP iLO:** The HP iLO (Integrated Lights-Out) management processor is the core foundation for the HP iLO Management Engine
- HP Agentless Management: Provides built in server health monitoring and alerting capability without OS agents, that starts working the moment a power cord and an Ethernet cable are connected.
- HP Active Health System: Always on, continuous monitoring for increased stability and shorter downtimes; 100% configuration history; Health and service alerts and easy export and upload to Service and Support.
- HP Intelligent Provisioning: Lets customers provision and configure a single server without any separate media. No more SmartStart CDs or Smart Update Firmware DVD are needed.
 - O To start Intelligent Provisioning:
 - Press the F10 key during the ProLiant Gen8 server boot process (also known as power on self test or POST).
 - Please go to the Intelligent Provisioning website at www.hp.com/go/intelligentprovisioning for additional information and to view usage videos.
 - Use the Service Pack for ProLiant (SPP) at www.hp.com/go/spp to get firmware and software updates.
- HP iLO Mobile App: Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: www.hp.com/go/ilo/mobileapp

NOTE: For more information, visit: http://www.hp.com/go/ilo or HP iLO



Standard Features

Management Engine technologies whitepaper

HP Insight Management

HP Service Pack for ProLiant HP Service Pack for ProLiant (SPP) and HP Smart Update Manager (HP SUM) provide a comprehensive approach to firmware and system software maintenance. Together they provide better operating stability and ensure maximum uptime. The SPP will be updated at a predictable cadence, typically coinciding with new HP server hardware launches. By enabling firmware to be updated online and integrating firmware and system software updates in one operation, HP SUM and the SPP offer faster updates of individual servers and dramatically faster updates of entire BladeSystem enclosures. Further improving system uptime and stability is the fact that HP provides 12 months of support for each Service Pack for ProLiant release.

The user experience around HP SUM and the SPP has been improved in several ways, starting with the web download. A single web page provides access to a single download containing both the latest version of HP SUM and the latest SPP. Optional smaller subsets with only specific types of servers or specific operating systems are offered to save on download time. The HP SUM application provides a straightforward, intuitive user interface that guides the user through the steps of discovery, analyses and update, providing comprehensive information on available updates, criticality and interdependencies. This information is also available in reports. By providing the option of multiple local or shared repositories which can be easily updated from hp.com, HP SUM provides the tools to optimize stability and consistency throughout the company. While HP SUM and the SPP recommend the combinations of firmware and system software that HP has found to be the best practice, the application gives customers the flexibility to set their own specific baseline.

The Service Pack for ProLiant has been rigorously tested with specific attention for interaction between firmware, drivers and agents both within the server as well as in interaction with the BladeSystem enclosure components (Onboard Administrator and Virtual Connect). This testing ensures the highest quality as well as providing the input for HP SUM to deploy updates taking into account all interdepencies, when determining the correct updates and order of update deployment.

NOTE: The Service Pack for ProLiant (which includes HP SUM) can be downloaded from www.hp.com/go/spp/download. More information can be found: http://www.hp.com/go/SmartUpdate, www.hp.com/go/spp and http://www.hp.com/go/hpsum

Security

Power-on password
Administrator's password



Standard Features

Warranty

This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

NOTE: Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have HP replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at:

http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html



Optional Features

HP Insight management software

HP Insight Control

HP Insight Control, a product option, delivers essential infrastructure management that can help save time and money by making it easy to deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. HP Insight Control also supports Location and Power Discovery Services to automate many configuration, asset tracking, and power management tasks to speed implementation and prevent downtime. For more information, see http://www.hp.com/go/insightcontrol.

HP Insight Control includes one year of 24 x 7 HP Software Technical Support and Update Service ensuring rapid access to HP support staff and proactive delivery of software updates. For more information about this service, see: http://www.hp.com/services/insight.

HP iLO Essentials

HP iLO Essentials license ideal for small and medium business customers. The specially created HP iLO Essentials (a subset of iLO Advanced functionality) saves SMB customers time and money, by ease of remote server set up through the interactive virtual media, lowering operational costs with remote access via the Integrated Remote Console, and faster time to resolution with email-based proactive notifications. With this newly designed HP iLO Essentials license SMB customers now have the option of a server management package solely design and priced just right for their IT environments. HP iLO Essentials is available on all HP ProLiant Gen8 e-series making this an ideal solution for small business owners. For more information, see: http://www.hp.com/go/iLO/essentials

HP iLO Advanced

HP Integrated Lights-Out Advanced License a product option, providing smart remote server management without compromise. iLO Advanced unlocks the full set of remote administration functionality for all HP ProLiant servers by activating the full Virtual Keyboard Video and Mouse remote console, multiuser collaboration, console record and replay, GUI-based and scripted virtual media and virtual folders, and enhanced security and power management functionality. For more information, see: http://www.hp.com/go/iloadvanced

HP Matrix Operating Environment The HP Matrix Operating Environment (Matrix OE) for ProLiant and Integrity servers is an integrated command center that helps you instantly adjust to dynamic business demands. This advanced infrastructure management software lets you reduce the cost of common data center tasks by up to 40 percent while keeping pace with your changing business.

The HP Matrix OE includes the automated provisioning, optimization, and recovery management capabilities for HP CloudSystem Matrix, the ideal platform for private cloud and Infrastructure as a Service (laaS).

NOTE: For more information, visit: http://www.hp.com/go/matrixoe

Optional Features

High Performance Clusters

HP Cluster Platforms

HP Cluster Platforms are specifically engineered, factory-integrated large-scale ProLiant clusters optimized for High Performance Computing, with a choice of servers, networks and software. Operating system options include specially priced offerings for Red Hat Enterprise Linux and SUSE Linux Enterprise Server, as well as Microsoft Windows HPC Server. A Cluster Platform Configurator simplifies ordering. http://www.hp.com/go/clusters.

HP HPC Interconnects

High Performance Computing (HPC) interconnect technologies are available for this server as part of the HP Cluster Platform portfolio. These high-speed InfiniBand and Gigabit interconnects are fully supported by HP when integrated within an HP cluster. Flexible, validated solutions can be defined with the help of configuration tools.

http://www.hp.com/techservers/clusters/ucp/index.html

HP Insight Cluster Management Utility HP Insight Cluster Management Utility (CMU) is an HP-licensed and HP-supported suite of tools that are used for lifecycle management of hyperscale clusters of Linux ProLiant systems. CMU includes software for the centralized provisioning, management and monitoring of nodes. CMU makes the administration of clusters user friendly, efficient, and effective.

http://www.hp.com/go/cmu

Storage Software

Whether you need to solve a specific data protection, archiving, or storage command and control challenge, or deliver on strategic consolidation, compliance, or continuity initiatives, look no further than HP storage software. Our storage software helps you reduce costs, simplify storage infrastructure, protect vital assets and respond faster to business opportunities. Storage software that gets the job done:

Data Protection and Recovery Software

Whether you're a large enterprise or a smaller business, HP data protection and recovery software will cost-effectively protect you against disaster and ensure business continuity.

• Data Archive and Migration Software

HP's storage software enables you to comply with data retention and retrieval requirements, improve application performance, and reduce costs by efficiently migrating infrequently accessed or less valuable data to lower cost storage.

Storage Resource Management Software (SRM)

HP's storage resource management software reduces operational costs and provides the command and control foundation you need to efficiently manage and visualize your physical and virtual environments.

• Data Replication Software

HP offers array-based and host-based replication software for use in disaster recovery, testing, application development and reporting.

Storage Device Management Software

Maximize your investment in HP storage and networking with software that enables hardware-specific configuration, performance tuning and connectivity management.

HP StoreVirtual VSA

With HP StoreVirtual VSA you can use the power of virtualization to turn a set of heterogeneous and disconnected physical disk drives in your servers and storage devices into a single pool of logical storage capacity.

NOTE: For more information available Storage Software including QuickSpecs, please see: www.hp.com/go/storage/software.



Optional Features

HP Insight Online

HP Insight Online is a new addition to the HP Support Center for one stop, secure access to product and HP support information personalized to your IT environment. Insight Online can automatically display devices remotely monitored by HP Insight Remote Support. With Insight Online's easy navigation you can efficiently track your IT support contracts and device status from anywhere and at anytime. www.hp.com/go/insightonline

HP Proactive Insight experience

Prevent problems with innovative, automated monitoring tools and proactive services. The HP Proactive Insight experience consist of using Insight Online, Insight Remote Support, and Proactive Care Support Service as one integrated solution. The Proactive Insight experience provides you with expert advice and personalized, cloud-based automated IT support, helping to prevent unplanned down time and solve problems quickly. For more information, visit: www.hp.com/go/proactiveinsightexperience

for Servers and Storage

Factory Express Portfolio HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

> Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSAxxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to: http://www.hp.com/go/factory-express.

HP Simple Configurator

SCE is a guided self service tool to help sales and non technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact HP's Customer Business Center or an Authorized Partner for assistance. http://www.hp.com/products/configurator



Service and Support

Service and Support

HP Technology Services for Industry Standard Servers and BladeSystem

Capitalizing on HP ProLiant server and HP BladeSystem capabilities requires a service partner who understands your increasingly complex business technology environment. That's why it makes sense to team up with the people who know HP infrastructure hardware and software best - the experienced professionals at HP Services.

What HP ProLiant and BladeSystem Services can do for you

HP ProLiant and BladeSystem Services can help you design, deploy, test, integrate, support, and manage IT and infrastructure solutions. This way, HP proposes services solutions that include more than just uplift of base warranty. Foundation Care services deliver scalable support-packages for HP industry-standard servers and software. You can choose the type and level of service that is most suitable for their business needs. If you are running business critical environments, HP offers Proactive Care or Critical Advantage. These services help deliver high levels of application availability through proactive service management and advanced technical response

You can get the support you need by choosing from one of a number of service packaged solutions we have designed to address wider set of customer support needs.

HP Technology Services meets business challenges with services offered in three support recommendations - **Optimized Care, Standard Care, and Basic Care** - available for each product group. Such support solutions enable customers to optimize technology operations, minimize risk and drive better business outcomes with easy-to-buy, easy-to-use scalable support recommendations for servers, storage, networking and software designed to meet your specific needs.

All three service recommendations include support services from the broader portfolio of Foundation Care and Proactive Care services.

Optimized Care

Optimized Care: Supports maintaining servers at optimum performance availability

HP ProLiant Server Hardware Installation

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf

HP Installation and Startup for Insight Control Software / HP SIM

Provides for the deployment and basic configuration of HP Insight Control or HP SIM (Systems Insight Manager) on HP ProLiant ML and DL series servers or HP BladeSystem servers http://h20195.www2.hp.com/v2/GetPDF.aspx/4AAO-9972ENW.pdf

3-Year HP 24x7 4 hour Response, Proactive Care

Helps optimize your systems and delivers high levels of application availability through proactive service management and advanced technical response. A skilled Technical Manager will own your call and end to end until resolved, delivering a single point of contact for you. Helping you to resolve your hardware and software issues and minimizing downtime in your business critical environment.

Additional Services: Factory Express, Education Services, Proactive Select - 30 Credit Package



Service and Support

Standard Care

Standard Care: Service recommendation that maintains high level of server availability

HP ProLiant Server Hardware Installation

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf

HP Installation and Startup for Insight Control Software / HP SIM

Provides for the deployment and basic configuration of HP Insight Control or HP SIM (Systems Insight Manager) on HP ProLiant ML and DL series servers or HP BladeSystem servers http://h20195.www2.hp.com/v2/GetPDF.aspx/4AAO-9972ENW.pdf

HP Foundation Care 24x7 Service

Provides problem resolution support across the stack of HW, firmware, and HP and 3rd party SW. In case the issue is with 3rd party SW, HP does known issue resolution. If HP cannot solve the issue, it will contact the third-party vendor and create a problem incident on your behalf.

http://h20195.www2.hp.com/V2/GetPDF.aspx/4AA3-8232ENW.pdf

Additional Services: Software support service with 24X7 availability with a 2 hour response, Training courses on Microsoft, Linux (Red Hat and SUSE), VMware, and HP Insight Software, 10 Proactive Select Credit package, Factory Express

http://www8.hp.com/us/en/business-services/it-services.html?compURI=1078865

Basic Care

Basic Care: delivers minimum recommended support service level

HP ProLiant Server Hardware Installation

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf

3-Year HP 24x7 4 hour Response, Hardware Support Onsite Service

Provides you with rapid remote support and if required an HP authorized technical engineer will be on site 24X7 begin hardware maintenance service within 4 hours of the service request being logged http://h20195.www2.hp.com/V2/GetPDF.aspx/5982-6547EEE.pdf

3-Year, HP 24x7 Software Support for Insight Control

Provides remote 3-year software support service that delivers comprehensive software services, including access to HP technical resources and software updates

http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-6645EEE.pdf

Additional Services: Factory Express, Education Services, Proactive Select - 10 Credits

Insight Remote Support

Provides 24 X 7 remote monitoring, proactive notifications, and problem resolution. Learn more http://www.hp.com/go/insightremotesupport



Service and Support

HP Support Center

Personalized online support portal with access to information, tools and experts to support HP business products. Submit support cases online, chat with HP experts, access support resources or collaborate with peers. Learn more http://www.hp.com/go/hpsc

HP's Support Center Mobile App* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HP Insight Remote Support and HP Support Center are available at no additional cost with a HP warranty, HP Care Pack or HP contractual support agreement.

*HP' Support Center Mobile App is subject to local availability

Warranty / Service Coverage

For ProLiant servers and storage systems, the services cover HP-branded hardware options qualified for the server, purchased at the same time or afterward, internal to the enclosure, as well as external monitors up to 22" and tower UPS products; these items will be covered at the same service level and for the same coverage period as the server unless the maximum supported lifetime and/or the maximum usage limitation has been exceeded. Coverage of the UPS battery is not included; standard warranty terms and conditions apply.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by HP due to malfunction. It does not apply to any exchange of Disk or SSD/Flash Drives that have not failed. SSD/Flash Drives that are specified by HP as consumable parts and/or that have exceeded maximum supported lifetime and/or the maximum usage limit as set forth in the manufacturer's operating manual or the technical data sheet are not eligible for the defective media retention service feature option.

For more information

To learn more on HP ProLiant servers and HP BladeSystem servers, please contact your HP sales representative or HP Authorized Channel Partner. Or visit: http://www.hp.com/services/proliant



Pre-configured Models

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

NOTE: Pre-configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.

NOTE: HP does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.

NOTE: If you desire a custom configuration please see "Configuration Information - Factory Integrated Models" section of this QuickSpecs.

NOTE: Maximum speed supported depends on the CPU installed. Entry model will support maximum speed of 1600 MHz. Please see Memory Population Table or the Online Memory Configuration Tool at: www.hp.com/go/ddr3memory-configurator. **NOTE:** All Pre-configured Models come populated with some hard drive blanks installed. Should the customer need additional hard drive blanks, they can order more using either P/N 666987-B21: HP SFF Gen8 Hard Drive Blank Kit or P/N 666986-B21: HP LFF Gen8 Hard Drive Blank Kit.

Base Models

HP ProLiant DL320e Gen8 Processor(s)
E3-1220v2 1P 4GB-U Hot Cache Memory
Plug 4 LFF 350W PS Server
Memory

675421-001

Processor(s) (1) Intel® Xeon® E3-1220v2 (3.1GHz/4-core/8MB/69W, HT) Processor

Cache Memory 8MB (1x8MB) Level3

Memory 4GB (1 x 4GB) Unbuffered DIMMs PC3-12800E (1600MHz)

Network Controller HP Ethernet 1Gb 2-port 330i Adapter

Storage Controller HP Dynamic Smart Array B120i Controller

Hard Drive None ship standard

NOTE: Only SATA 3 Gbit/s data transmission guaranteed without HP Smart

Array Card.

Internal Storage 4 bay LFF Hot Plug Drive Cage; includes 3 LFF hard drive blanks

Optical Drive Bay None ships standard
PCI-Express Slots 1 PCIe3 x16 and 1 PCIe2 x8

Power Supply 350 Watts Non-Hot Plug, Non redundant Power Supply

NOTE: The 350 Watts Non-Hot Plug Non redundant Power Supply is rated at

85% efficiency.

Fans 4 fan modules ship standard, non-redundant

Management HP iLO Management Engine (standard)

Optional: HP iLO Essentials or HP Insight Control

Form Factor 1U, HP Friction Rail Kit

Warranty Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support

with next business day response.



Pre-configured Models

Performance Models

HP ProLiant DL320e Gen8 Processor(s)
E3-1240v2 1P 8GB-U P222 Cache Memory
Hot Plug 4 LFF 350W PS

Server

675422 -001

Processor(s) (1) Intel® Xeon® E3-1240v2 (3.4GHz/4-core/8MB/69W, HT) Processor

ache Memory 8MB (1x8MB) Level3

Memory 8GB (2 x 4GB) Unbuffered DIMMs PC3-12800E (1600MHz)

Network Controller HP Ethernet 1Gb 2-port 330i Adapter

Storage Controller HP Smart Array P222/512MB FBWC Controller

Hard Drive None ship standard

Internal Storage 4 bay LFF Hot Plug Drive Cage; includes 3 LFF hard drive blanks

Optical Drive Bay None ships standard PCI-Express Slots 1 PCIe2 x8 available

Power Supply 350 Watts Non-Hot Plug, Non redundant Power Supply

NOTE: The 350 Watts Non-Hot Plug Non redundant Power Supply is rated at

85% efficiency.

Fans 4 fan modules ship standard, non-redundant

Management HP iLO Management Engine (standard)

Optional: HP Insight Control

Form Factor 1U, HP Friction Rail Kit

Warranty Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support

with next business day response



Smart Buys

HP ProLiant DL320e Gen8 Processor(s)
E3-1220v2 1P 4GB-U Nonhot Plug 4 LFF 350W PS

Server 687520-S01

Processor(s) (1) Intel® Xeon® E3-1220v2 (3.1GHz/4-core/8MB/69W, HT)

Cache Memory 8MB (1x8MB) Level3

Memory 4GB (1 x 4GB) Unbuffered DIMMs PC3-12800E (1600MHz)

Network Controller HP Ethernet 1Gb 2-port 330i Adapter

Storage Controller HP Dynamic Smart Array B120i Controller

Hard Drive (1) HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) Midline Hard Drive

Internal Storage 4 LFF HDD Bays; includes 3 LFF hard drive blanks

Optical Drive Bay None ships standard
PCI-Express Slots 1 PCIe2 x16 and 1 PCIe2 x8

Power Supply 350 Watts Non-Hot Plug, Non redundant Power Supply

Fans 4 fan modules ship standard, non-redundant

Management HP iLO Management Engine (standard)

Optional: HP Insight Control

Form Factor 1U, HP Friction Rail Kit

Warranty Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support

with next business day response.

HP ProLiant DL320e Gen8 Processor(s)
E3-1240v2 1P 8GB-U Hot Cache Memory
Plug 4 LFF 350W PS Server

687519-S01

Processor(s) Intel® Xeon® E3-1240v2 (3.4GHz/4-core/8MB/69W, HT)

Cache Memory 8MB (1x8MB) Level3

Memory 8GB (2 x 4GB) Unbuffered DIMMs PC3-12800E (1600MHz)

Network Controller HP Ethernet 1Gb 2-port 330i Adapter

Storage Controller HP Dynamic Smart Array B120i Controller

Hard Drive None ship standard

Internal Storage 4 LFF HDD Bays; includes 3 LFF hard drive blanks

Optical Drive Bay None ships standard
PCI-Express Slots 1 PCIe2 x16 and 1 PCIe2 x8

Power Supply 350 Watts Non-Hot Plug, Non redundant Power Supply

Fans 4 fan modules ship standard, non-redundant

Management HP iLO Management Engine (standard)

Optional: HP Insight Control

Form Factor 1U, HP Friction Rail Kit

Warranty Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support

with next business day response.



Configuration Information - Factory Integrated Models

NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

NOTE: Factory Integrated Models must start with a CTO Server.

NOTE: FIO indicates that this option is only available as a factory installable option.

NOTE: All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.

Step 1: Base Configuration (choose one of the following configurable models)

HP Models HP ProLiant DL320e Gen8 Hot Plug 4 LFF Configure-to-order Server

675597-B21

NOTE: All 6G SATA/SAS Drives listed in HDD section are tested and supported for both

3G and 6G speed. A HP Smart Array Controller is required for 6G HDD.

Factory Integrated Model ships with:

1U Chassis with 4 LFF Hot Plug Drive Cage HP Ethernet 1Gb 2-port 330i Adapter HP iLO Management Engine (standard)

HP Dynamic Smart Array B120i SATA Controller (RAID 0/1/10)

NOTE: For set up instructions for HP Dynamic Smart Array B120i SATA Controller please

refer to the HP ProLiant DL300 series server user guide

NOTE: For general information about HP Dynamic Smart Array B120i SATA Controller,

please visit:

http://h18004.www1.hp.com/products/servers/proliantstorage/arraycontrollers/smartarrayb120i/index.html

HP ProLiant DL320e Gen8 Hot Plug 8 SFF Configure-to-order Server

675598-B21

Factory Integrated Model ships with:

1U Chassis with 8 SFF Hot Plug Drive Cage

HP Ethernet 1Gb 2-port 330i Adapter

HP iLO Management Engine (standard)

HP Dynamic Smart Array B120i SATA Controller (RAID 0/1/10)

NOTE: For set up instructions for HP Dynamic Smart Array B120i SATA Controller please

refer to the HP ProLiant DL300 series server user guide

NOTE: For general information about HP Dynamic Smart Array B120i SATA Controller,

please visit:

http://h18004.www1.hp.com/products/servers/proliantstorage/arraycontrollers/smartarrayb120i/index.html

HP ProLiant DL320e Gen8 Non-hot Plug 4 LFF Configure-to-order Server

675596-B21

NOTE: All 6G SATA/SAS Drives listed in HDD section are tested and supported for both

3G and 6G speed. A HP Smart Array Controller is required for 6G HDD.

Factory Integrated Model ships with:

1U Chassis with 4 LFF Non hot plug Drive Cage

HP Ethernet 1Gb 2-port 330i Adapter

HP iLO Management Engine (standard)

HP Dynamic Smart Array B120i SATA Controller (RAID 0/1/10)

NOTE: For set up instructions for HP Dynamic Smart Array B120i SATA Controller please

refer to the HP ProLiant DL300 series server user guide

NOTE: For general information about HP Dynamic Smart Array B120i SATA Controller, please visit:



Configuration Information - Factory Integrated Models

http://h18004.www1.hp.com/products/servers/proliantstorage/arraycontrollers/smartarrayb120i/index.html

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

| noted) | | |
|---------------|--|------------|
| HP Processors | Entry Processors NOTE: All support up to 1600MHz DDR3 memory speeds. | |
| | HP DL320e Gen8 Intel® Pentium® G2120 (3.1GHz/2-core/3MB/55W) FIO Processor Kit | 703278-L21 |
| | Performance Processors | |
| | NOTE: All support up to 1600MHz DDR3 memory speeds. | |
| | HP DL320e Gen8 Intel® Xeon® E3-1220Lv2 (2.3GHz/2-core/3MB/17W) FIO Processor Kit | 682789-L21 |
| | HP DL320e Gen8 Intel® Xeon® E3-1220v2 (3.1GHz/4-core/8MB/69W) FIO Processor Kit | 682787-L21 |
| | HP DL320e Gen8 Intel® Xeon® E3-1230v2 (3.3GHz/4-core/8MB/69W) FIO Processor Kit | 682785-L21 |
| | HP DL320e Gen8 Intel® Xeon® E3-1240v2 (3.4GHz/4-core/8MB/69W) FIO Processor Kit | 682783-L21 |
| | HP DL320e Gen8 Intel® Xeon® E3-1270v2 (3.5GHz/4-core/8MB/69W) FIO Processor Kit | 682781-L21 |
| | HP DL320e Gen8 Intel® Xeon® E3-1290v2 (3.7GHz/4-core/8MB/87W) FIO Processor Kit | 682777-L21 |
| HP Memory | NOTE: To realize the performance memory capabilities listed in this document, HP SmartMemory is required. For additional information, please see the HP SmartMemory QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/14225_na/14225_na.html NOTE: HP memory from previous generation servers are not fully compatible with new Active Health features on the DL320e Gen8 Server. | |
| | Unbuffered with ECC DIMMs (UDIMMs) | |
| | HP 2GB (1x2GB) Single Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit | 669320-B21 |
| | HP 2GB (1x2GB) Single Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit | 647905-B21 |
| | HP 2GB (1x2GB) Single Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit/S-Buy | 647905-S21 |
| | HP 4GB (1x4GB) Dual Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit | 669322-B21 |
| | HP 4GB (1x4GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit | 647907-B21 |
| | HP 4GB (1x4GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit/S-Buy | 647907-S21 |
| | HP 8GB (1x8GB) Dual Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit | 669324-B21 |
| | HP 8GB (1x8GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit | 647909-B21 |
| | NOTE: All DDR3 memory option kits consist of one DIMM per kit. For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: www.hp.com/go/ddr3memory-configurator. NOTE: Depending on the memory configuration and processor model, 1600MHz and | |



Configuration Information - Factory Integrated Models

1333MHz memory may operate at a lower speed. Please see the see the "Memory" section later in this document and the Online Memory Configuration Tool for details at www.hp.com/go/ddr3memory-configurator.

NOTE: For additional memory rules and guidelines, see the "Memory" section later in this document.

NOTE: For more information on ProLiant Energy Efficient Features, see:

www.hp.com/go/proliant-energy-efficient

NOTE: PC3L is a low voltage memory.

HP Power Supplies

NOTE: Prior to making a power supply selection it is highly recommended that the HP Power Advisor is run to determine the right size power supply for your server

configuration. The HP Power Advisor is located at: www.hp.com/go/hppoweradvisor.

HP 350W 1U Factory Integrated Power Supply Kit **NOTE:** The 350 Watts Power Supply is rated at 85% efficiency.

HP Common Slot Platinum Plus Power Supply Kits

NOTE: The following Power Supplies offer 94% efficiency with support for Intelligent Power Discovery.

HP 460W Common Slot Platinum Plus Hot Plug Power Supply Kit 656362-B21

HP Common Slot Gold Power Supplies

NOTE: The following Power Supplies offer 92% efficiency.

HP 460W Common Slot Gold Hot Plug Power Supply Kit 503296-B21

HP DL320e Gen8 Factory Integrated RPS Enablement Kit

NOTE: When selecting Common Slot power supply options for the DL320e Gen8 server, a HP DL320e Gen8 RPS Enablement FIO Kit (675451-B21) is required for HP common slot redundant power supply configurations.

NOTE: Option Kits for AC power supplies include the power supply and one PDU IEC cable.

NOTE: HP ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). For a full list of optional HP power cords please go to www.hp.com/products/powercords

NOTE: Power Specification and Technical Content for supported power supplies can be found at:

http://h18000.www1.hp.com/products/quickspecs/14209_na/14209_na.html



675450-B21

675451-B21

Configuration Information - Factory Integrated Models

Step 3: Choose Additional Factory Integratable Options

| HP USB Kit | HP Gen8 FIO Internal USB Kit | 662961-B21 |
|---------------------|--|------------|
| HP Rail Kits | NOTE: Gen8 rail kits have changed significantly from prior generation rail kits. Please take a moment to review the installation documentation that comes with the server to help you with the installation of your Gen8 server. NOTE: Rail kits are optional for Gen8 and are no longer included standard with the server. Customers have the option to purchase their server without a rail kit. CAUTION: HP recommends that at least two people are used for all rack server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation. | |
| | HP 1U FIO Friction Rail Kit NOTE: Kit contains non-telescoping friction rails which do not allow for in rack serviceability. The HP 1U Gen8 Cable Management Arm is not available when using Friction Rails. Caution: HP recommends that a minimum of two people is required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation. | 663200-B21 |
| HP Insight Software | HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Single Server FIO License | C6N36A |
| | HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle FIO Electronic License | C6N36ABE |
| _ | HP OneView with iLO Advanced - Server hardware required on same purchase order | |
| Management Software | HP OneView for ProLiant DL Server incl 3yr 24x7 Supp FIO Bundle Physical 1 Svr Lic | E5Y43A |
| | HP OneView incl 3yr 24x7 Supp Bundle 1 Svr E-LTU | E5Y43AAE |

Step 4: Choose Additional Options for Factory Integration

NOTE: For additional options, please refer to the "Core Options" and "Additional Options" section below.



Core Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

HP Unique Options

HP DL320e Gen8 Mini SAS Cable Kit

685018-B21

NOTE: HP DL320e Gen8 mini SAS cable kit would be required for the server to be

compatible with 4LFF Hot Plug drives, H222 and P222 controllers.

HP Memory

NOTE: To realize the performance memory capabilities listed in this document, HP SmartMemory is required. For additional information, please see the HP SmartMemory QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/14225_na/14225_na.html **NOTE:** HP memory from previous generation servers are not fully compatible with SmartMemory features in Gen8 Servers.

Unbuffered with ECC DIMMs (UDIMMs)

| HP 2GB (1x2GB) Single Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit | 669320-B21 |
|--|------------|
| HP 2GB (1x2GB) Single Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit | 647905-B21 |
| HP 2GB (1x2GB) Single Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit S-Buy | 647905-S21 |
| HP 4GB (1x4GB) Dual Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit | 669322-B21 |
| HP 4GB (1x4GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit | 647907-B21 |
| HP 4GB (1x4GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit S-Buy | 647907-S21 |
| HP 8GB (1x8GB) Dual Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit | 669324-B21 |
| HP 8GB (1x8GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low | 647909-B21 |

NOTE: All DDR3 memory option kits consist of one DIMM per kit. For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: www.hp.com/go/ddr3memory-configurator.

NOTE: Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see: www.hp.com/go/proliant-energy-efficient.

NOTE: PC3L is a low voltage memory.

Voltage Memory Kit

HP Optical Drives

| HP 9.5mm SATA DVD-ROM JackBlack Optical Drive | 652238-B21 |
|---|------------|
| HP 9.5mm SATA DVD-RW JackBlack Optical Drive | 652241-B21 |

HP Hard Drives

NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.



Core Options

NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

| HP 1.2TB 6G SAS 10K rpm SFF (2.5-inch) SC Dual Port Enterprise 3yr Warranty Hard Drive | 718162-B21 |
|--|------------|
| HP 1.2TB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 697574-B21 |
| HP 900GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 652589-B21 |
| HP 900GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive S-Buy | 652589-S21 |
| HP 600GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 652583-B21 |
| HP 600GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive S-Buy | 652583-S21 |
| HP 450GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 652572-B21 |
| HP 300GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 652564-B21 |
| HP 300GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive S-Buy | 652564-S21 |
| HP 300GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 652611-B21 |
| HP 300GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive S-Buy | 652611-S21 |
| HP 146GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 652605-B21 |
| HP 146GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive S-Buy | 652605-S21 |
| SAS Hot Plug SmartDrive SFF (2.5-inch) Midline Drives | |
| HP 1TB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive | 652749-B21 |
| HP 500GB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive | 652745-B21 |
| SAS Hot Plug SmartDrive LFF (3.5-inch) Enterprise Drives | |
| HP 600GB 6G SAS 15K rpm LFF (3.5-inch) SC Enterprise 3yr Warranty Hard Drive | 652620-B21 |
| HP 450GB 6G SAS 15K rpm LFF (3.5-inch) SC Enterprise 3yr Warranty Hard Drive | 652615-B21 |
| SAS Hot Plug SmartDrive LFF (3.5-inch) Midline Drives | |
| HP 4TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 695510-B21 |
| HP 3TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 652766-B21 |
| HP 2TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 652757-B21 |
| HP 1TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 652753-B21 |
| NOTE: Please see the QuickSpecs for Technical Specifications and additional | |
| information: | |
| http://h18000.www1.hp.com/products/quickspecs/12244_na/12244_na.html | |
| 6G SATA Hot Plug with SmartDrive SFF (2.5-inch) Midline (MDL) Drives | CEE740 D24 |
| HP 1TB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive | 655710-B21 |
| HP 1TB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive S-Buy | 655710-S21 |
| HP 500GB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive | 655708-B21 |
| HP 500GB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive S-Buy | 655708-S21 |
| 6G SATA Hot Plug with SmartDrive LFF (3.5-inch) Midline (MDL) Drives | C02C07 B24 |
| HP 4TB 6G SATA 7.2k rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 693687-B21 |
| HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 628061-B21 |
| HP 2TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 658079-B21 |
| HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 657750-B21 |



Core Options

| HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive S-Buy | 657750-S21 |
|---|------------|
| HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 658071-B21 |
| HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive S-Buy | 658071-S21 |
| 6G SATA Non-Hot Plug LFF (3.5-inch) Midline (MDL) Drives | |
| HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive | 628065-B21 |
| HP 2TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive | 659339-B21 |
| HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive | 659337-B21 |
| HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive | 659341-B21 |
| NOTE: Please see the QuickSpecs for Technical Specifications and additional information: | |
| http://h18000.www1.hp.com/products/quickspecs/13021_na/13021_na.html | |
| 12G SAS High Endurance Hot Plug SFF (2.5-inch) Enterprise Performance Solid State Drives | |
| HP 800GB 12G SAS High Endurance SFF 2.5-in SC Enterprise Performance 3yr Wty Solid State Drive | 741159-B21 |
| NOTE: This drive supports Gen8 servers only. | |
| HP 400GB 12G SAS High Endurance SFF 2.5-in SC Enterprise Performance 3yr Wty Solid State Drive | 741155-B21 |
| NOTE: This drive supports Gen8 servers only. | |
| HP 200GB 12G SAS High Endurance SFF 2.5-in SC Enterprise Performance 3yr Wty Solid State Drive | 741151-B21 |
| NOTE: This drive supports Gen8 servers only. | |
| 12G SAS Mainstream Endurance Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Drives | |
| HP 800GB 12G SAS Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty | 741146-B21 |
| Solid State Drive NOTE: This drive supports Gen8 servers only. | 741140-021 |
| HP 400GB 12G SAS Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty | 741142-B21 |
| Solid State Drive NOTE: This drive supports Gen8 servers only. | |
| HP 200GB 12G SAS Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 741138-B21 |
| NOTE: This drive supports Gen8 servers only. | |
| 6G SATA Value Endurance Hot Plug SFF (2.5-inch) Enterprise Boot Solid State Drives | |
| HP 120GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Boot 3yr Wty Solid State Drive | 717965-B21 |
| HP 80GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Boot 3yr Wty Solid State Drive | 734360-B21 |
| 6G SATA Value Endurance Hot Plug LFF (3.5-inch) Enterprise Boot Solid State Drives | |
| HP 120GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Boot 3yr Wty Solid State Drive | 718171-B21 |
| HP 80GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Boot 3yr Wty Solid State Drive | 734362-B21 |
| | |



Core Options

| 6G SATA Value Endurance Hot Plug SFF (2.5-inch) Enterprise Value Solid State Drives | |
|--|------------|
| HP 800GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive | 717973-B21 |
| HP 480GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive | 717971-B21 |
| HP 600GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive | 739898-B21 |
| HP 300GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive | 739888-B21 |
| HP 240GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive | 717969-B21 |
| 6G SATA Value Endurance Hot Plug LFF (3.5-inch) Enterprise Value Solid State Drives | |
| HP 800GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive | 718189-B21 |
| HP 600GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive | 739900-B21 |
| HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive | 718183-B21 |
| HP 300GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive | 739890-B21 |
| HP 240GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive | 718177-B21 |
| 6G SATA ME Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Drives | |
| HP 800GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691868-B21 |
| HP 400GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691866-B21 |
| HP 200GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691864-B21 |
| HP 100GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691862-B21 |
| 6G SATA ME Hot Plug LFF (3.5-inch) Enterprise Mainstream Solid State Drives | |
| HP 800GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691860-B21 |
| HP 400GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691856-B21 |
| HP 200GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691854-B21 |
| HP 100GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691852-B21 |
| 6G SAS SLC Hot Plug SFF (2.5-inch) Enterprise Performance Solid State Drives | |
| HP 400GB 6G SAS SLC SFF (2.5-inch) SC Enterprise Performance 3yr Warranty Solid State Drive | 653082-B21 |
| | |



HP ProLiant DL320e Generation 8 (Gen8)

QuickSpecs

Core Options

| | HP 200GB 6G SAS SLC SFF (2.5-inch) SC Enterprise Performance 3yr Warranty Solid State Drive | 653078-B21 |
|---------------|--|------------|
| | NOTE: Please see the QuickSpecs for Technical Specifications and additional information: | |
| | http://h18000.www1.hp.com/products/quickspecs/14038_na/14038_na.html | |
| | Hard Drive Kits | |
| | NOTE: All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server. | |
| | NOTE: The part numbers for single HDD blanks below are provided should the customer require replacement HDD blanks for their server. | |
| | NOTE: The mixing of standard SAS drives with SAS SSD drives is supported within the | |
| | server, but limits the RAID configuration to two separate RAID 0 volumes. Mixing of other drives types is not supported. | |
| | HP LFF Gen8 Hard Drive Blank Kit | 666986-B21 |
| | HP SFF Gen8 Hard Drive Blank Kit | 666987-B21 |
| HP Networking | Gigabit Ethernet Adapters | |
| | HP NC112T PCI Express Gigabit Server Adapter | 503746-B21 |
| | HP NC365T 4-port Ethernet Server Adapter | 593722-B21 |
| | HP Ethernet 1Gb 2-port 361T Adapter | 652497-B21 |
| | HP Ethernet 1Gb 4-port 331T Adapter | 647594-B21 |
| | HP Ethernet 1Gb 2-port 332T Adapter | 615732-B21 |
| | 10 Gigabit Ethernet Adapters | |
| | NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per each | |
| | adapter. | _ |
| | HP NC523SFP 10Gb 2-port Server Adapter | 593717-B21 |
| | HP NC552SFP 10Gb 2-port Ethernet Server Adapter | 614203-B21 |
| | HP Ethernet 10Gb 2-port 530T Adapter | 656596-B21 |
| | HP Ethernet 10Gb 2-port 560SFP+ Adapter | 665249-B21 |
| | NOTE: Please see the QuickSpecs for Technical Specifications and additional | |
| | information: www.hp.com/go/ProLiantNICs. | |



Core Options

HP Power Supplies

NOTE: Prior to making a power supply selection it is highly recommended that the HP Power Advisor is run to determine the right size power supply for your server configuration. The HP Power Advisor is located at: www.hp.com/go/hppoweradvisor

HP Common Slot Platinum Plus Power Supply Kits

NOTE: The following Power Supplies offer 94% efficiency with support for Intelligent Power Discovery.

HP 460W Common Slot Platinum Plus Hot Plug Power Supply Kit 656362-B21

HP Common Slot Gold Power Supplies

NOTE: The following Power Supplies offer 92% efficiency.

HP 460W Common Slot Gold Hot Plug Power Supply Kit

NOTE: Option Kits for AC power supplies include the power supply and one PDU IEC cable.

NOTE: HP ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). For a full list of optional HP power cords please go to www.hp.com/products/powercords

NOTE: Power Specification and Technical Content for supported power supplies can be found at:

http://h18000.www1.hp.com/products/quickspecs/14209_na/14209_na.html



503296-B21

Additional Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

| HP Management |
|----------------------|
| Hardware |

HP Dedicated iLO Management Port Kit

674845-B21

C6N27A

| HP Insight Software | HP | Insid | iht | Sot | twa | re |
|---------------------|----|-------|-----|-----|-----|----|
|---------------------|----|-------|-----|-----|-----|----|

HP Insight Control

HP Insight Control including 1yr 24x7 Technical Support and Updates Single Server License

HP Insight Control including 1yr 24x7 Technical Support and Updates Single Server **C6N27S**

License S-Buy

HP Insight Control including 1yr 24x7 Technical Support and Updates Electronic License C6N28ASE

S-Buy

HP Insight Control Server Provisioning Media Kit BD883A

HP Insight Management Media Kit

C6N31A

HP Insight Control Server Deployment including 1yr 24x7 Support Electronic License

HP Insight Control Server Deployment including 1yr 24x7 Support Single Server License

T9082AAE 452151-B21

NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.

NOTE: Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.

NOTE: Licenses ship without media. The HP Insight Control Media Kit can be ordered separately, or can be downloaded at: http://www.hp.com/go/insightupdates.

NOTE: For additional license options please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12631_na/12631_na.html

HP Integrated Lights-Out (iLO)

HP Integrated Lights-Out (iLO) Advanced for ProLiant

HP iLO Advanced including 1yr 24x7 Technical Support and Updates Single Server License

512485-B21

HP iLO Advanced 1 Server License with 3yr 24x7 Tech Support and Updates

BD505A

HP iLO Essentials

HP Integrated Lights-Out Essentials including 3yr 24x7 Tech Support and Updates Single Svr License

BD774A

HP Integrated Lights-Out Essentials including 1yr 24x7 Tech Support and Updates Single Svr License

BD775A

NOTE: For additional license options please see the QuickSpecs at:

http://h18004.www1.hp.com/products/quickspecs/14276 na/14276 na.html NOTE:

For more information, visit: http://www.hp.com/go/ilo.



Additional Options

Converged Infrastructure HP OneView **Management Software**

HP OneView with iLO Advanced

HP OneView Media Kit Phys No Lic E5Y37A HP OneView incl 3yr 24x7 Supp Phys 1 Svr Lic E5Y34A HP OneView incl 3yr 24x7 Supp Flex Qty E-LTU E5Y35AAE

HP OneView without iLO Advanced

HP OneView w/o iLO Adv incl 3yr 24x7 Supp Phys 1 Svr Lic E5Y38A HP OneView w/o iLO Adv inc 3yr 24x7 Supp Flex Qty E-LTU E5Y39AAE

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/14621_na/14621_na.html

High Performance Clusters

HP Cluster Management Utility

HP Insight Cluster Management Utility 1yr 24x7 Flexible License QL803B HP Insight Cluster Management Utility 3yr 24x7 Flexible License **BD476A**

NOTE: These part numbers can be used to purchase one certificate for multiple licenses and support with a single activation key. Each license is for one node (server). Customer will receive a printed end user license agreement and license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online in order to obtain a license key. Customer also will receive a support agreement.

HP Insight Cluster Management Utility Media

BD477A

NOTE: For additional license kits please see the QuickSpecs at

http://h18004.www1.hp.com/products/guickspecs/12612 na/12612 na.html.

HP Security

HP Trusted Platform Module Option

488069-B21

NOTE: The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys. Windows® BitLocker™ Drive Encryption (BitLocker) is a data protection feature available in Windows Server® 2008. BitLocker leverages the enhanced security capabilities of a Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help protect user data and to ensure that a server running Windows Server 2008 has not been tampered with while the system was offline. For more information about TPM, including a white paper, go to: www.hp.com/go/TPM.

NOTE: ProLiant OS pre-installed units will come with the partition required for TPM deployment.

NOTE: The TPM key is unique to every TPM deployed server and must be retained. Misplacing or losing the key could result in data loss.

HP 1U Security Gen8 Bezel Kit

664918-B21

Additional Options

| Additional Options | | |
|-------------------------------|--|------------|
| HP Storage Controllers | SAS Controllers | |
| | Smart Array P222 Controller | |
| | HP Smart Array P222/512 FBWC 6Gb 1-port Int/1-port Ext SAS Controller | 631667-B21 |
| | Smart Array P420 Controller | |
| | HP Smart Array P420/1GB FBWC 6Gb 2-ports Int SAS Controller | 631670-B21 |
| | HP Smart Array P420/2GB FBWC 6Gb 2-ports Int SAS Controller | 631671-B21 |
| | Smart Array P421 Controller | |
| | HP Smart Array P421/1GB FBWC 6Gb 2-ports Ext SAS Controller | 631673-B21 |
| | HP Smart Array P421/2GB FBWC 6Gb 2-ports Ext SAS Controller | 631674-B21 |
| | Optional Upgrades | |
| | HP 2GB P-series Smart Array Flash Backed Write Cache | 631681-B21 |
| | HP DL320e Gen8 Mini SAS Cable Kit | 685018-B21 |
| | HP SmartCache No Media 24x7 Technical Support 1 Svr License | D7S26A |
| | HP SmartCache No Media 24x7 Technical Support Flexible License | D7S27A |
| | HP SmartCache No Media 24x7 Technical Support Electronic License | D7S27AAE |
| | NOTE: Please see the QuickSpecs for Technical Specifications and additional | |
| | information: http://h18000.www1.hp.com/products/quickspecs/14227_na/14227_na.html | |
| | (Smart Array P222 Controller) | |
| | http://h18000.www1.hp.com/products/quickspecs/14228_na/14228_na.html | |
| | (Smart Array P420 Controller) | |
| | http://h18000.www1.hp.com/products/quickspecs/14229_na/14229_na.html (Smart Array P421 Controller) | |
| | Host Bus Adapter | |
| | HP H220 Host Bus Adapter | 650933-B21 |
| | HP H221 Host Bus Adapter | 650931-B21 |
| | NOTE: This is a 2 x4 External Port HBA. | 030331 BE1 |
| | HP H221 PCIe 3.0 SAS Host Bus Adapter | 729552-B21 |
| | HP H222 Host Bus Adapter | 650926-B21 |
| | NOTE: Please see the QuickSpecs for Technical Specifications and additional | |
| | information: | |
| | http://h18004.www1.hp.com/products/quickspecs/14336_na/14336_na.html | |
| | (HBA 220) http://h18004.www1.hp.com/products/quickspecs/14222_na/14222_na.html | |
| | (HBA 221) | |
| | http://h18004.www1.hp.com/products/quickspecs/14337_na/14337_na.html | |
| | (HBA 222) | |
| | SCSI HBA | |
| | HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter | 412911-B21 |
| | NOTE: Please see the following QuickSpecs for additional information: | |
| | http://h18000.www1.hp.com/products/quickspecs/12566_na/12566_na.html | |



(SC11Xe HBA)

Additional Options

| HP | Tai | ne | Ra | ck | מוו |
|----|-----|----|----|----|-----|
| | | | | | |

NOTE: For the complete range of tape drives, autoloaders, libraries and media see: http://www.hp.com/go/tape. For hardware and software compatibility of HP tape backup products see: http://www.hp.com/storage/SPOCK and www.hp.com/go/ebs. **NOTE:** For Internal drives to be connected to DL servers please make sure that you

order rack mount kit as well.

| HP StoreEver LTO-6 Ultrium 6250 Tape Drive in 1U Rack-mount Kit | COL99A |
|---|--------|
| HP StoreEver LTO-6 Ultrium 6650 SAS Internal Tape Drive | EH963A |
| HP StoreEver LTO-6 Ultrium 6650 SAS External Tape Drive | EH964A |
| HP StoreEver LTO-6 Ultrium 6250 Internal Tape Drive | EH969A |
| HP StoreEver LTO-6 Ultrium 6250 External Tape Drive | EH970A |
| HP StoreEver 1/8 G2 LTO-6 Ultrium 6250 FC Tape Autoloader | COH19A |

HP Tape Storage Systems HP StoreEver MSL6480

HP StoreEver MSL6480 Scalable Base Module

QU625A

NOTE: Please see the QuickSpecs for Technical Specifications and additional

http://h18000.www1.hp.com/products/quickspecs/14604_na/14604_na.html

HP Disk Backup

NOTE: For the complete range of RDX drives and media see:

http://www.hp.com/go/rdx. For hardware and software compatibility of HP disk backup products see: http://www.hp.com/storage/SPOCK.

HP RDX Removable Disk Backup System

HP RDX320 USB3.0 External Disk Backup System B7B63A HP RDX500 USB3.0 Internal Disk Backup System **B7B64A** HP RDX500 USB3.0 External Disk Backup System B7B66A HP RDX1000 USB3.0 Internal Disk Backup System B7B67A HP RDX1000 USB3.0 External Disk Backup System B7B69A

NOTE: Please see the QuickSpecs for additional part numbers, Technical Specifications, and additional information:

http://h18000.www1.hp.com/products/quickspecs/13036_na/13036_na.html

HP Disk Storage Systems Disk Enclosures

HP D2600 w/12 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 48TB Bundle

E7W32A

NOTE: Please see the QuickSpecs for Technical Specifications and additional

information:

http://h18000.www1.hp.com/products/quickspecs/13404_na/13404_na.html



Additional Options

HP Storage Options

Fibre Channel HBA

NOTE: The following is a list of all Fibre Channel Host Bus Adapters for Windows and

Linux. For detailed compatibility information please see:

http://h18006.www1.hp.com/storage/saninfrastructure/hba.html

QLogic Fibre Channel HBAs

HP 81Q 8Gb 1-port PCIe Fibre Channel Host Bus Adapter AK344A HP 82Q 8Gb 2-port PCIe Fibre Channel Host Bus Adapter AJ764A

Converged Network Adapter

HP CN1000Q Dual Port Converged Network Adapter BS668A HP StoreFabric CN1100R Dual Port Converged Network Adapter QW990A

HP Uninterruptible Power HP Rack-mountable UPS **Systems**

HP R1500 G3 Uninterruptible Power Supply (UPS)

AF469A HP R1.5kVA G3 1U NA Uninterruptible Power System

NOTE: Please see the QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/14059_na/14059_na.html

HP R/T3000 G2 Uninterruptible Power System (UPS)

HP R/T3000 G2 2U L530 Low Voltage NA/JP Uninterruptible Power System AF466A HP R/T3000 G2 2U L620 High Voltage NA/JP Uninterruptible Power System AF467A

NOTE: Please see the QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/14058_na/14058_na.html

R5000 Uninterruptible Power System (UPS)

HP R5KVA 3U L630 High Voltage NA/JP Uninterruptible Power System

NOTE: Please see the QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/14109_na/14109_na.html (Worldwide)

R7000 Uninterruptible Power System (UPS)

HP R7KVA 4U 50A High Voltage NA/JP Uninterruptible Power System

NOTE: Please see the QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/14110_na/14110_na.html

NOTE: For additional information on HP Uninterruptible Power Systems please go to:

www.hp.com/servers/rackups.

NOTE: For additional information on sizing your HP UPS, please reference:

http://www.upssizer.com

NOTE: Please see the UPS and PDU cable matrix's on the HP Power Protection and Management page. Under Power Cords, click on the "HP Power Cord Matrix" link. That link will list cable descriptions, requirements, and specifications for UPS and PDU units.

Please see the following link: www.hp.com/products/powercords.



AF460A

AF462A

Additional Options

| HP Basic Power | |
|-------------------------|----|
| Distribution Units (bPD | U) |

| HP Basic Power Distribution Unit: 1U/OU Version | |
|---|--------|
| HP 1.9kVA 120 Volt L5-20 Input (12xNEMA 5-20R) NA/JP Basic PDU | H5M54A |
| HP 3.6kVA 200-240 Volt Detachable C20 Input (12xC13) WW Basic PDU | H5M56A |
| HP Basic Power Distribution Unit: Half Height Version | |
| HP 2.8kVA 120 Volt L5-30 Input (18xNEMA 5-20R) NA/JP Basic PDU | H5M55A |
| HP 3.6kVA 200-240 Volt Detachable C20 Input (18xC13) WW Basic PDU | H5M57A |
| HP 4.9kVA 208 Volt L6-30 Input (20xC13) NA/JP Basic PDU | H5M58A |
| HP 8.6kVA 208 Volt L15-30 3-Phase Input (18xC13) NA/JP Basic PDU | H5M61A |
| HP Basic Power Distribution Unit: Mid Height Version | |
| HP 4.9kVA 208 Volt L6-30 Input (24xC13/6xC19) NA/JP Basic PDU | H5M59A |
| HP 8.3kVA 208 Volt CS8265C Input (30xC13/6xC19) NA/JP Basic PDU | H5M60A |
| HP Hardwired 200-240 Volt Input (30xC13/6xC19) WW Basic PDU | H5M75A |
| HP 5.7kVA 208 Volt L21-20 3-Phase Input (24xC13/3xNEMA 5-20R) NA/JP Basic PDU | H5M63A |
| HP 8.6kVA 208 Volt L21-30 3-Phase Input (24xC13/3xC19/3xNEMA 5-20R) NA/JP Basic PDU | H5M64A |
| HP 8.6kVA 208 Volt L15-30 3-Phase Input (24xC13/6xC19) NA/JP Basic PDU | H5M62A |
| HP Basic Power Distribution Unit: Full Height Version | |
| HP 11kVA 400 Volt IEC309 30A 3-Phase Input (36xC13/6xC19) NA Basic PDU | H5M67A |
| HP Basic Power Distribution Unit: 480/277 Volt Version | |
| HP 13.2kVA 480 Volt IEC309 30A 3-Phase Input (15 Outlet) NA Basic PDU | H3X07A |
| HP 19.9kVA 480 Volt IEC309 30A 3-Phase Input (30 Outlet) NA Basic PDU | H3X08A |
| HP 800VA - 277V Input / 230V Output NA Rack Mount Transformer | H3X09A |
| NOTE: Please see the QuickSpecs for Technical Specifications and additional information: | |
| http://h18000.www1.hp.com/products/quickspecs/14557_na/14557_na.html | |
| NOTE: Additional HP Power Distribution Units are available. For a complete list of all HP PDUs and additional information please visit www.hp.com/go/rackandpower. | |



Additional Options

HP Remote Monitoring Power Distribution Units (mPDU)

HP Intelligent Power Distribution Units (iPDU)

iPDU Core Units

iPDU Extension Bars

| HP 4.9kVA 24A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit | AF520A |
|--|--------|
| HP 8.3kVA 40A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit | AF521A |
| HP 8.6kVA 24A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit | AF522A |
| HP 14.4kVA 40A Three Phase NA/JP Intelligent Modular Power Distribution Unit | AF533A |
| HP 17.3kVA 48A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit | AF523A |
| HP 17.3kVA 24A 415V Three Phase L22-30 NA Core Intelligent Power Distribution Unit | AF902A |
| HP 17.3kVA 48A 208V Three Phase 12 Outlet Core NA/JP Intelligent Power Distribution Unit | AF535A |
| HP 17.3kVA 24A 415V Three Phase 12 Outlet Core NA/JP Intelligent Power Distribution Unit | AF537A |
| iPDU Kits with Standard Extension Bars | |
| HP 4.9kVA 24A Single Phase NA/JP Intelligent Modular Power Distribution Kit | AF531A |



HP 8.6kVA 24A Three Phase NA/JP Intelligent Modular Power Distribution Kit

AF532A

Additional Options

HP 5xC13 Intelligent PDU Extension Bar G2 Kit

AF547A

HP 5xC13 Outlets Power and UID LEDs Pair Standard Extension Bar

AF528A

NOTE: Please see the QuickSpecs for Technical Specifications and additional

information:

http://h18000.www1.hp.com/products/quickspecs/13650_na/13650_na.html

NOTE: Additional HP Power Distribution Units are available. For a complete list of all HP

PDUs and additional information please visit: www.hp.com/go/rackandpower.

HP Rack Series

HP Intelligent Series Racks

HP 636 1075mm Pallet Intelligent Series Rack
HP 636 1075mm Shock Intelligent Series Rack
HP 642 1075mm Pallet Intelligent Series Rack
HP 642 1075mm Shock Intelligent Series Rack
HP 642 1075mm Pallet Intelligent Series Rack
HP 647 1075mm Pallet Intelligent Series Rack
HP 647 1075mm Shock Intelligent Series Rack
HP 647 1075mm Shock Intelligent Series Rack
BW911A
HP 647 1075mm Shock Intelligent Series Rack
BW912A

NOTE: Please see the QuickSpecs for Technical Specifications such as height, width,

depth, weight, and color:

http://h18000.www1.hp.com/products/quickspecs/14223_na/14223_na.html **NOTE:** For additional information regarding Rack Cabinets, please see the following

URL: http://www.hp.com/go/rackandpower.

HP Rack Options

HP Location Discovery Services

HP 36U Location Discovery Kit

HP 42U Location Discovery Kit

HP 47U Location Discovery Kit

BW946A

BW947A

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/14429 na/14429 na.html

HP TFT7600 G2 KVM Console and Monitor (TFT7600 G2)

HP TFT7600 G2 KVM Console Rackmount Keyboard US Monitor AZ870A
HP TFT7600 G2 KVM Console Rackmount Keyboard US TAA Monitor AZ885A

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/13731_na/13731_na.html

HP USB Keyboard and Mouse

HP USB BFR with PVC Free US Keyboard/Mouse Kit

631341-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/13972_na/13972_na.html

HP Server Console Switches

HP Server Console 0x2x8 Port Analog Switch

HP Server Console 0x2x16 Port Analog Switch

AF616A

AF617A



Additional Options

HP USB and SD Options

| UD TAA Oo 2014 Gold (UNA Company) Company of | AF636A |
|--|------------|
| HP TAA 0x2x16xKVM Server Console G2 Switch | AF626A |
| NOTE: Please see the QuickSpecs for Technical Specifications and additional information: | |
| http://h18000.www1.hp.com/products/quickspecs/11834_na/11834_na.html | |
| HP Server Console Switch G2 with Virtual Media & CAC | |
| HP 0x2x16 KVM Server Console Switch G2 with Virtual Media CAC Software | AF618A |
| HP 0x2x32 KVM Server Console Switch G2 with Virtual Media CAC Software | AF619A |
| HP KVM CAT5 1-pack USB Interface Adapter | 336047-B21 |
| NOTE: Please see the QuickSpecs for Technical Specifications and additional | |
| information: | |
| http://h18000.www1.hp.com/products/quickspecs/13475_na/13475_na.html | |
| HP 1x4 USB/PS2 KVM Console Switch | |
| HP 1x4 USB/PS2 KVM Console Switch | AF611A |
| HP 1x1Ex8 KVM IP Console Switch G2 with Virtual Media CAC Software | AF620A |
| HP 2x1Ex16 KVM IP Console Switch G2 with Virtual Media CAC Software | AF621A |
| HP 4x1Ex32 KVM IP Console Switch G2 with Virtual Media CAC Software | AF622A |
| NOTE: Please see the QuickSpecs for Technical Specifications and additional | |
| information: | |
| http://h18000.www1.hp.com/products/quickspecs/13474_na/13474_na.html | |
| Rail Kits | 663303 D34 |
| HP 1U Cable Management Arm for Ball Bearing Gen8 Rail Kit | 663203-B21 |
| HP 1U Small Form Factor Ball Bearing Gen8 Rail Kit | 663201-B21 |
| HP 1U Large Form Factor Ball Bearing Gen8 Rail Kit | 663202-B21 |
| HP Flash Media Kits for USB Drives | |
| HP 2GB USB Flash Media Drive Key Kit | 608447-B21 |
| NOTE: HP qualified blank USB key for use with HP ProLiant servers that support the | |
| VMware virtualization environment and other HP value-add software. HP recommends | |
| this industry standard USB flash device for use with VMware ESXi. USB device must be | |
| installed in the internal slot of the ProLiant server for use with VMware ESXi. Refer to HP VMware Getting Started Guide for installation instructions. | |
| HP 8GB USB Enterprise Mainstream Flash Media Drive Key Kit | 737953-B21 |
| HP Enterprise Mainstream Flash Media Kits for Memory Cards | 757555-021 |
| HP 8GB SD Enterprise Mainstream Flash Media Kit | 726113-B21 |
| HP 32GB SD Enterprise Mainstream Flash Media Kit | |
| • | 700136-B21 |
| NOTE: Please see the QuickSpecs for Technical Specifications and additional information: | |
| http://h18000.www1.hp.com/products/quickspecs/13971_na/13971_na.html | |
| | |



Additional Options

HP Care Pack Services

Proactive Care

NOTE: Collaborative Support plus Proactive services delivered by the onshore, local language Advanced Solution Center (ASC), end-to-end case ownership from a Technical Solution Specialists and Technical Account Manager who remotely delivers firmware/software revision management, proactive scans and incident trend reports. Recommended for customers running a virtualized infrastructure and/or customers who desire an enhanced call support experience.

HP 3 year 4 hour 24x7 ProLiant DL320e Proactive Care Service

HP 3 year 4 hour 24x7 with Defective Media Retention ProLiant DL320e Proactive Care

U6F04E
Service

HP 3 year 6 hour Call to Repair 24x7 ProLiant DL320e Proactive Care Service

HP 3 year 6 hour Call to Repair 24x7 w/Defective Media Retention ProLiant DL320e

Proactive Care SVC

U6F09E

U6F10E

Collaborative Support

NOTE: Hardware break/fix plus 24x7 software diagnosis support with collaborative call management for a broad spectrum of 3rd Party software products including O/S and hypervisors. Recommended for customers procuring 3rd party SW O/S and hypervisors from the software vendors directly and deploying them on HP ProLiant servers.

HP 3 year 4 hour 24x7 ProLiant DL320e Collaborative Support

HP 3 year 4 hour 24x7 with Defective Media Retention ProLiant DL320e Collaborative

Support

U6F01E

U6F02E

HP 3 year 6 hour Call to Repair 24x7 ProLiant DL320e Collaborative Support

HP 3 year 6 hour Call to Repair 24x7 w/Defective Media Retention ProLiant DL320e

Collaborative Sup

U6F08E

Proactive Care Personalized Support Option

NOTE: To add an onsite Account Support Manager (ASM) to Proactive Care. ASM is an assigned resource who delivers support planning and brings technical expertise and best practices advices for the customer's environment.

HP 3 year ISS ProactiveCare Personalized Support U6W98E

Installation Services

NOTE: Reduce the time required to get your system up and running and help minimize disruptions to your business.

HP Installation ProLiant DL320e Service U6F51E
HP Startup ProLiant DL320e Service U6F53E

NOTE: For more information, customer/resellers can contact:

http://www.hp.com/services/carepack



Memory

HP SmartMemory

New HP SmartMemory now provides additional protection for your servers. With HP Authentication it can verify that you have true HP Qualified Memory in your HP ProLiant Gen8 server. With HP SmartMemory your new HP ProLiant server can take advantage of additional Gen8 enhancements in performance, durability and future manageability support through HP Active Health System

For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: www.hp.com/go/ddr3memory-configurator

Memory Subsystem Architecture

Intel Processor socket supports 2 channels and 2 DIMMs per channel. Total max. memory up to 32GB DDR3 PC3-12800E1600MHz.

Standard Memory Plus Optional Memory

Up to 32 GB memory is available with the optional installation of 4 x 8GB PC3-12800E UDIMM ECC DDR3 UDIMM Memory kits, operating at 1600MHz when fully populated at 2 DIMMs per Channel in 4 slots.

NOTE: The below chart does not represent all possible memory configurations.

NOTE: For best performance, it is recommended that customer installs memory in identical pairs

General Memory Population Rules and Guidelines:

- The HP ProLiant DL320e Gen8 Server has four memory slots
- There are two channels per server with two DIMM slot per channel
- Memory channel A consists of the two (2) DIMMs that are closest to the processor
- Memory channel B consists of the two (2) DIMMs that are furthest from the processor
- Different types of processors have different types of memory support.
- Support for single/dual-rank 1333/1600 MT/s ECC UDIMM (unbuffered DIMMS)
- The server supports up to 32 GB (4 x 8-GB) for Unbuffered DIMMs
- No support for LV-DIMMs; RDIMMs; Non-ECC UDIMMs
- Do not install DIMMs if the processor is not installed
- Populate DIMMs from heaviest load (double-rank) to lightest load (single-rank)
- Always use HP qualified DIMM

Farthest DIMM (either CHA or CHB) should always be populated first



Memory

| The UDIMM installing sequence: | | | | | |
|---------------------------------|-------|--------|--------|--------|--------|
| Memory | | Slot | | | |
| | | DIMM1C | DIMM2A | DIMM3D | DIMM4B |
| Standard (Entry Model) | 2 GB | Empty | 2 GB | Empty | Empty |
| Standard (Base Model) | 4 GB | Empty | 4 GB | Empty | Empty |
| Standard (Performance Model) | 8 GB | Empty | 4 GB | Empty | 4 GB |
| Maximum | 32 GB | 8 GB | 8 GB | 8 GB | 8 GB |

| Memory Speed by Processor Model | |
|---|-------------------------|
| Processor Models | Supported Memory Speeds |
| E3-1220v2, E3-1220Lv2, E3-1230v2, E3-1240v2, E3-1270v2, E3-1290v2, G2120, G2100 T | 1600/1333MHz |

Following are memory options available from HP:

HP Memory

NOTE: To realize the performance memory capabilities listed in this document, HP SmartMemory is required. For additional information, please see the HP SmartMemory QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/14225_na/14225_na.html

NOTE: HP memory from previous generation servers are not fully compatible with the DL320e Gen8 Server.

Unbuffered with ECC DIMMs (UDIMMs)

| HP 2GB (1x2GB) Single Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit | 669320-B21 |
|--|------------|
| HP 2GB (1x2GB) Single Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit | 647905-B21 |
| HP 4GB (1x4GB) Dual Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit | 669322-B21 |
| HP 4GB (1x4GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit | 647907-B21 |
| HP 8GB (1x8GB) Dual Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit | 669324-B21 |
| HP 8GB (1x8GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit | 647909-B21 |

NOTE: All DDR3 memory option kits consist of one DIMM per kit. For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: www.hp.com/go/ddr3memory-configurator.


NOTE: Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see: www.hp.com/go/proliant-energy-efficient.

NOTE: PC3L is a low voltage memory.



Storage





- 1 4 4 x 3.5" (LFF) SAS/SATA hard drive bays
 - A Optical Drive Bay: Optional DVD-ROM, or DVD-RW drive
- 1 8 8 x 2.5" (SFF) SAS/SATA hard drive bays
 - A Optical Drive Bay: Optional DVD-ROM, or DVD-RW drive

Technical Specifications

| recinical specifica | ונוטווס | | |
|---------------------|---|--|--|
| System Unit | Dimensions (H x W x D) | 8 SFF | 1.7 x 17.11 x 27.5 inches (4.32 x 43.46 x 69.90 cm) |
| | | 4 LFF | 1.7 x 17.11 x 29.5 inches (4.32 x 43.46 x 75.0 cm) |
| | Weight (approximate) | Maximum (all hard drives, power supply, and processor installed) | 8 SFF/4 LFF - 16.2/16.8 kg, 35.7/37.0 lb |
| | | Minimum (one hard drive, power supply, and processor installed) | 8 SFF/4 LFF - 10.9/11.9 kg, 24.0/26.2 lb |
| | Input Requirements | Rated Line Voltage | 100 to 120 VAC |
| | (HP ProLiant 350 W power | Rated Input Current | 6 Amps (at 100VAC) to 3 Amps (at 200 VAC) |
| | supply) | Rated Input Frequency | 50 to 60 Hz |
| | Power Supply Output (per power supply) | Rated Steady-State Power | 350 W (at 100 to 120 VAC), 350 W (at 200 to 240 VAC) |
| | | Maximum Peak Power | 400 W (at 100 to 120 VAC), 400 W (at 200 to 240 VAC) |
| | System Inlet Temperature | Operating | 10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 304.8 m (1.8°F per every 1000 ft) above sea level to a maximum of 3048 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C (86°F). |
| | | Non-operating | -30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr). |
| | Relative Humidity (non-condensing) | Operating | 10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing. |
| | | Non-operating | 5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, noncondensing. |
| | Altitude | Operating | 3048 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min). |
| | | Non-operating | 9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min). |
| | Acoustic Noise | Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were | |



measured in accordance with ISO 7779 (ECMA 74) and declared in accordance

Technical Specifications

with ISO 9296 (ECMA 109).

Idle (Note 1)

LWAd 5.0 B

LpAm 35 dB Average Bystander

Operating

LWAd 5.1 B

LpAm 35 dB Average Bystander

NOTE: Values are subject to change without notification and are for reference

only.

NOTE: Performance of system, options, and ancillary equipment will vary

depending on the system configuration.

NOTE: Levels presented do not account for non-Hewlett-Packard installed

hardware.

Emissions Classification

(EMC)

FCC Rating Class A

Normative Standards CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15;

ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC

60950-1

NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.

HP Dynamic Smart Array B120i Controller

Dimensions Embedded

Disk Drive and Enclosure U

Interface - Transfer rate

Up to 6Gb/s SATA (Serial ATA)

Connectors 6 internal SATA connectors

Server Interface x4 PCIe 2.0
SATA Speed 6Gb/s SATA links

Cache Memory Zero Memory RAID has no cache memory **Logical Drives Supported** Up to 8 logical volumes (6 physical drives)

Host Memory Addressing 64-bit, supporting greater than 4GB server memory space

Hot Plug Support Ye

RAID Support RAID 0 (Striping), RAID 1 (Mirroring)

RAID 1+0 (Striping & Mirroring)



Technical Specifications

HP Ethernet 1Gb 2-port 330i Adapter **Compatibility** IEEE 802.3 10Base-T

IEEE 802.3ab 1000Base-T IEEE 802.3u 100Base-TX

Data Transfer Method

PCI Express, four lanes (x8)

Controller

BCM5717

Network Transfer Rate

10Base-T (Half-Duplex)
10Base-T (Full-Duplex)

100Base-TX (Half-Duplex) 100Base-TX (Full-Duplex) 1000Base-TX (Half and

Full-Duplex)

Connector RJ-45 **Cable Support** 10Base-T

100Base-TX 1000BaseTX

Environment-friendly Products and Approach

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: http://www.hp.com/go/green. To recycle your product, please go to: http://www.hp.com/go/green or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/green. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

© Copyright 2014 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation.

AMD, the AMD Arrow logo, AMD Opteron™, and combinations thereof, are trademarks of Advanced Micro Devices, Inc.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.

